


HOISTWAY EMERGENCY DOOR RELEASE KEYS

HOISTWAY EMERGENCY DOOR RELEASE KEYS

Replacement release keys for GAL, Otis, Westinghouse locks and Schindler doors with Westinghouse locks. Allow emergency personnel to open hoistway door and to provide access to the hoistway – whether or not the elevator is on the other side. The ASME A17.1 and CAN/CSA-B44 elevator codes require that hoistway door release keys be used only by inspectors, maintenance and repair personnel.

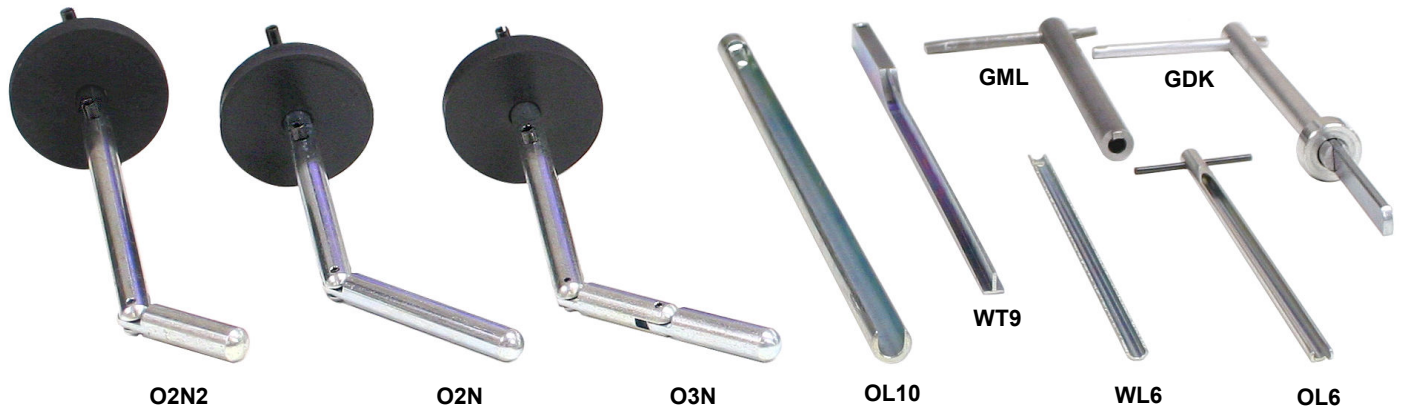

KP - set of nine (9) keys: O2N2, O2N, O3N, OL10, WT9, GML, WL6, GDK,

HOISTWAY DOOR RELEASE REPLACEMENT KEYS

Model	Type and Dimensions	Note
O2N2	Otis 2 section, 6"L, 3/8"OD	Otis #194AD4
O2N	Otis 2 section, 6"L, 3/8"OD	Otis #194AD3
O3N	Otis 3 section, 6"L, 3/8"OD	Otis #194AD7
OL10	Otis Lunar, 10-1/2"L, 7/16"OD	Otis #194AD2
WT9	Westinghouse T, 9"L, 1/4" x 1/4"	Westinghouse #M3550-5
GML	GAL M lock, 5"L, 7/16"OD	GAL #INT1H-0129N
WL6	Westinghouse Lunar, 6"L, 1/8"OR	Westinghouse #569A884H01
GDK	GAL KMO, 8"L, 3/8" x 1/8"*	GAL #INT1H-0034N
OL6	Otis L lock, 6"L, 1/4"OD	Otis L lock, key replacement
KP	Set of nine (9) keys above: O2N2, O2N, O3N, OL10, WT9, GML, WL6, GDK, OL6	GAL, Otis, Schindler Westinghouse
O3N2	Otis 3 section, 6"L, 11/32"OD**	Solid handle, solid shaft
O3N2F	Otis 3 section, 6"L, 11/32"OD**	Hollow handle, flexible shaft
O4NF	Otis 4 section, 8"L, 11/32"OD**	Hollow handle, flexible shaft

Note:

Dimensions rounded to closest fraction.

OD – outside diameter, OR – outside radius.

* Adjustable position collar. End tip is 3/8"W x 1/8" thick.

** End tip is 11/32"OD x 1/4" thick.



O3N2



O3N2F



O4NF

**QUALITY
ELEVATOR PRODUCTS, INC.**