


# ELEVATOR CAB RETRACTABLE TOE GUARD, CAR APRON

## RETRACTABLE TOE GUARD, WITH SAFETY SWITCH

- 16 Gauge galvanized steel
- 47-1/4" High, full extension
- 35" High, full retraction
- Adjustable safety switch
- Custom sizes available

Two-part telescopic retractable toe guard, or elevator apron, prevents toe injury, or falling of a person into the elevator hoistway, in case when cab stops above landing floor. Unmovable part attached to cab door sill. Telescopic part, factory connected to unmovable part, and can slide about 12-1/4" vertically toward cab sill. Movement of telescopic part activates safety switch and indicate that the guard is not fully extended. Safety switch DPST with 1NO, 1NC, and rated 10A 600VAC. Guard made from 16-gauge galvanized steel, 47-1/4" high, when fully extended, 35" high, when fully retracted. Custom sizes are available, please inquire.

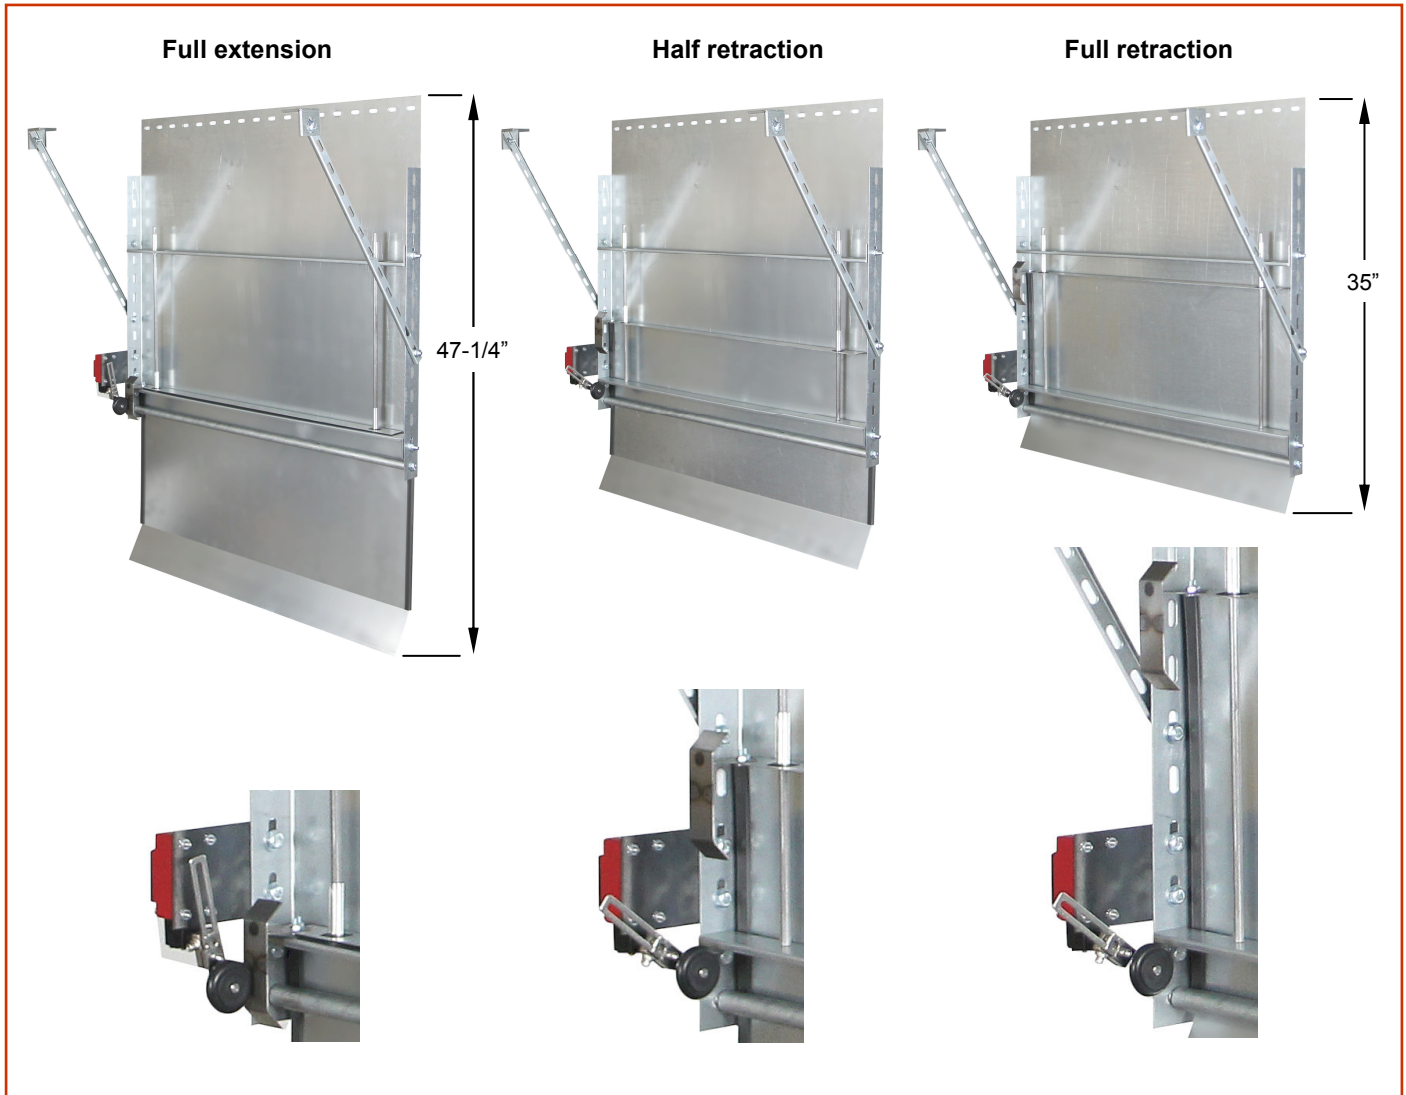

Model	Width	Model	Width
RETTG-30	30"	RETTG-50	50"
RETTG-36	36"	RETTG-54	54"
RETTG	42"	RETTG-60	60"
RETTG-46	46"	RETTG-96	96"
RETTG-48	48"		

Full extension 47-1/4" H, full retraction 35" H.


**Note:** Custom sizes are available, please inquire.

**QUALITY  
ELEVATOR PRODUCTS, INC.**

Car\_Toe\_Guard\_091721

Quality Elevator Products, Inc. • 7760 Merrimac Ave. Niles IL 60714 • Phone: (847) 581-0085 • Fax: (847) 581-0095 • www.qualityelev.com

# Elevator Cab Retractable Toe Guard, Car Apron Model RETTG

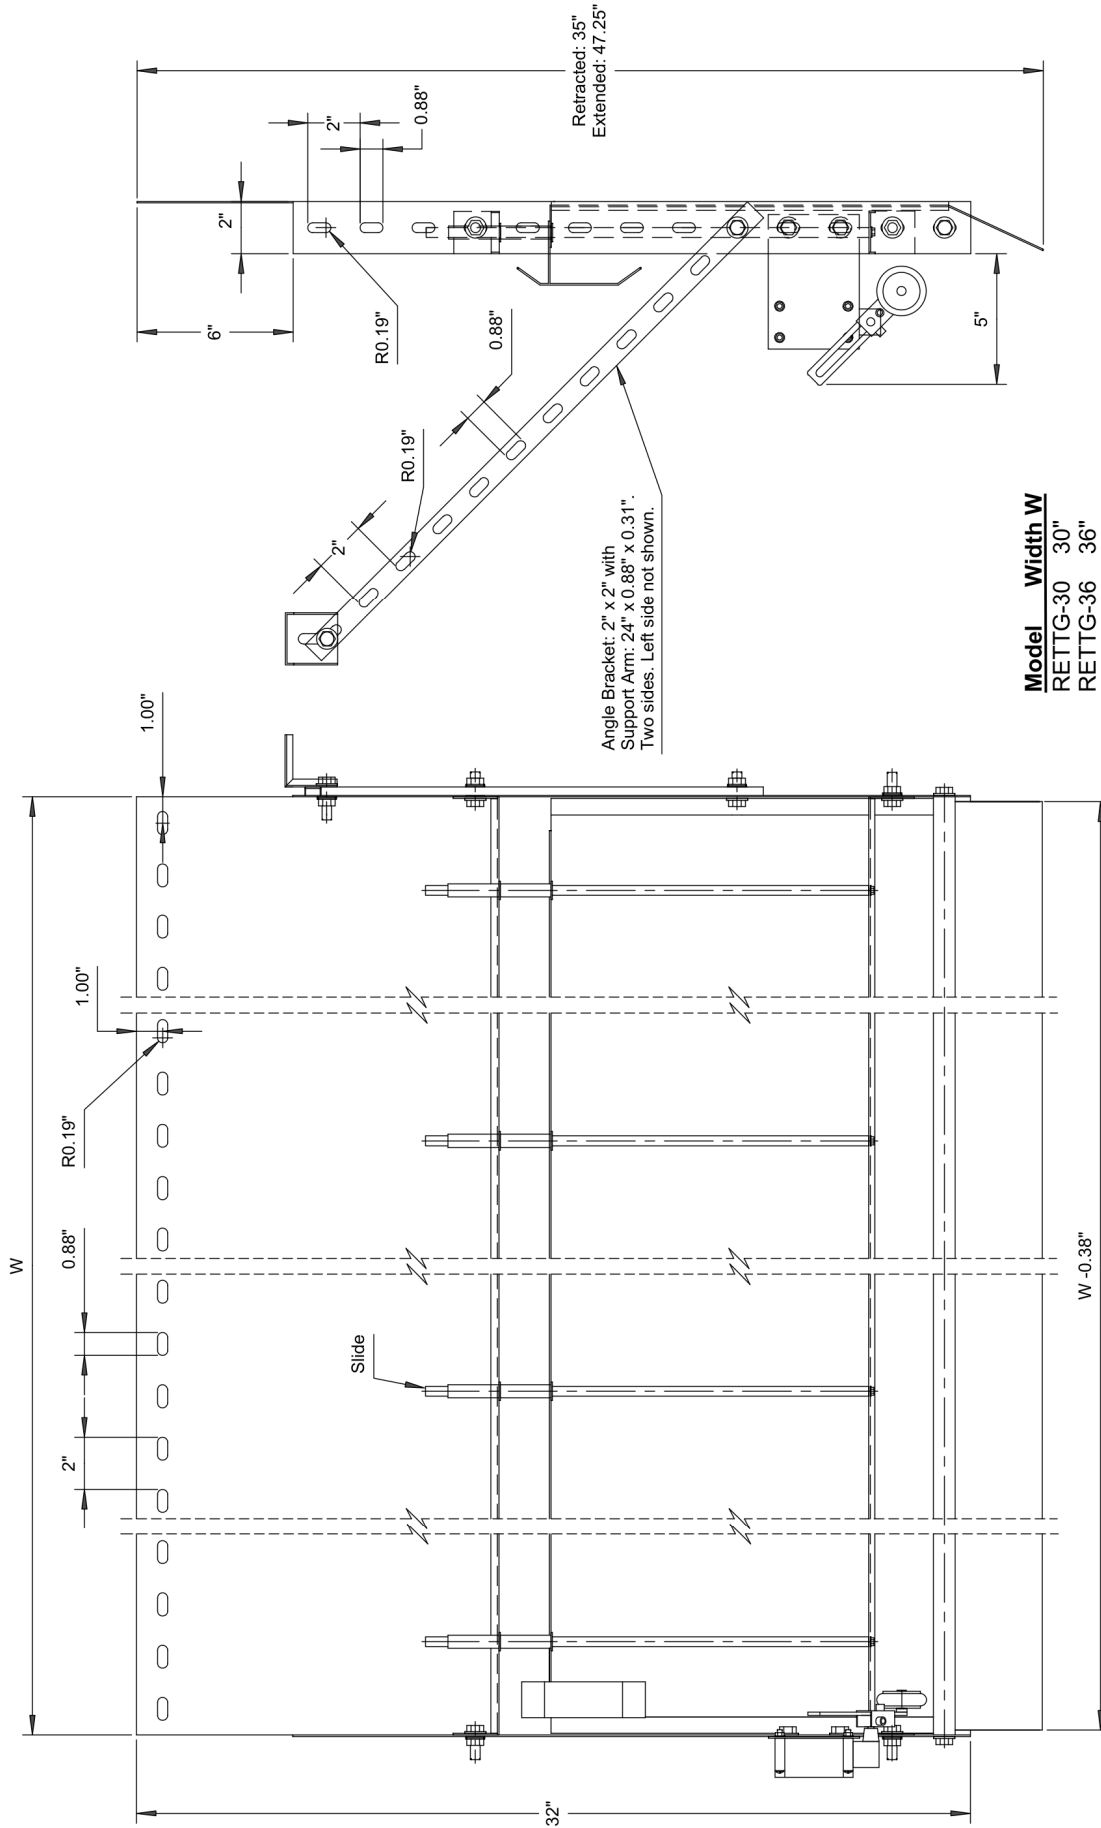

Model	Width	W
RETTG-30	30"	
RETTG-36	36"	
RETTG	42"	
RETTG-46	46"	
RETTG-48	48"	
RETTG-50	50"	
RETTG-54	54"	
RETTG-60	60"	
RETTG-96	96"	

1. Material: 16 Gauge Galvanized Steel (0.060").
2. Safety Switch: 1NO 1NC, 10A 600VAC, IP67, UL CSA Listed.
3. Rated speed Maximum 350 FPM.
4. Number of slides based on overall guard width.